

7: WIRELESS DETECTION

Wireless Manual Call Point

GENT
by Honeywell



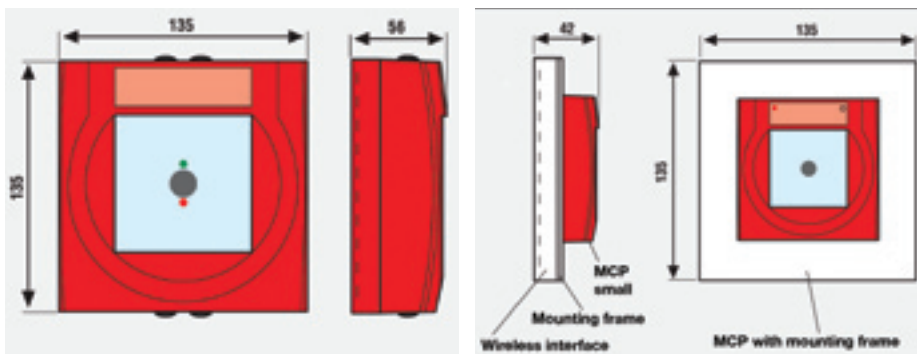
Wireless Manual Call Point

The Gent hybrid wireless system connects to the wireless transceiver via a wireless base. The wireless base can be fitted with either a red or white interface plate.

Additional features

- Dual band transmission
- Technology with channel change
- Regular functional check
- Alarm and fault forwarding in accordance with EN54-2
- Battery life up to 5 years

TECHNICAL SPECIFICATION	
Operating voltage	4 x 3.6 V lithium batteries
Battery life	2 to 5 years max
Current consumption	Approx 30uA
Frequency band 1	433/868 MHz
Range inside	Approx 30m
Range outside	Approx 300m
Operating temperature	-5°C to + 55°C
Storage temperature	-20°C to +70°C without batteries +25°C +/-10°C with batteries
Humidity	95% non condensing
Environmental protection	IP42
Material	PC/ASA plastic
Colour	Red Similar to RAL 3020
Weight	285g (with batteries)
Dimension (W x H x D)	135 x 135 x 20mm (without call point fitted)

Dimensions (mm)**ORDER CODES**

Wireless MCP 803-MCP-KIT
and Interface

SPARES AND REPLACEMENTS

Wireless Interface for MCP (red) 805601

Manual Call Point for
wireless system 804971

Adapter Plate for
wireless MCP 704967

Replacement Battery Pack
for 805593 & 805601 805597