


# FIREscape

## EL-DL1 Addressable Corridor Down Light

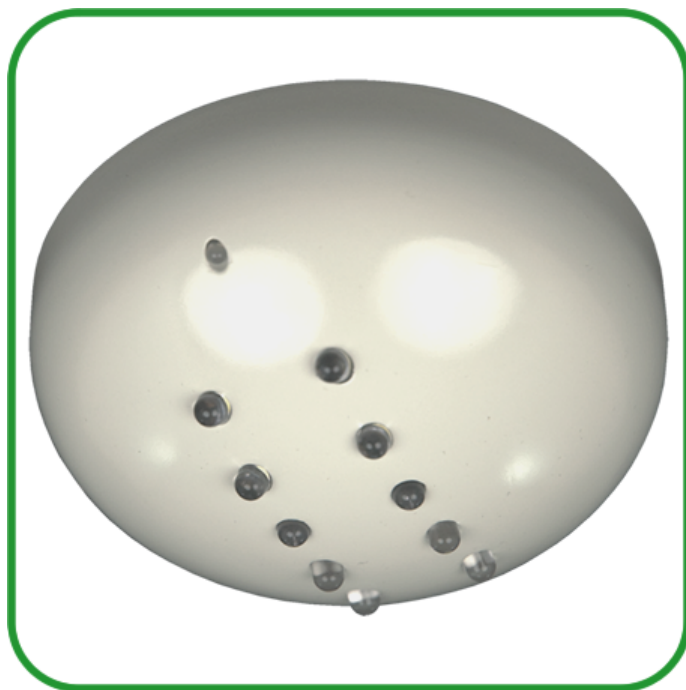

### Features

- ▶ Complies with BS5266 for escape routes
- ▶ LED technology
- ▶ Integral back-up battery
- ▶ Fixes to standard Hochiki base (YBN-R/3)

### Description

EL-DL1 is a LED-based, addressable route light/down light featuring ten LEDs. The installation interval of the lights is 7.7m, at an installation height of 3.5m. The unit's cup fixture contains the address unit and the back-up battery. The unit has been designed to easily fit onto Hochiki's standard sensor base, the YBN-R/3 and is manufactured to the same colour to seamlessly integrate aesthetically with the Hochiki range of fire detection devices.

| Specification   |  |
|-----------------|--|
| Case colour     | Ivory                                  |
| Material        | Fire resistant ABS plastic             |
| Fire class      | UL94 V-O                               |
| Operation time  | 1h to 3h                               |
| Dimensions (mm) | 99.7Ø x 50H (inc 8mm for YBN-R/3 base) |