

Warning Signs

Illuminated signs using high intensity LED indicators

Features

- High brightness white LED indicators for reliability and low power consumption
- Standard or easily customisable wording and language variants
- Split level function - allows top half and bottom half of sign to be illuminated independently with no light spillage between halves
- Internal buzzer with disable and external silence facility
- Available in red illuminated or yellow illuminated as standard, other colours available on request
- Connects to standard fire alarm sounder circuits
- Two wire 2 - stage (top half/ bottom half) voltage reversing input provided
- Voltage reversing, silenceable sounder output provided

Product Overview

- The new range of illuminated warning signs employ the very latest in LED technology to provide a high reliability, high brightness, audio/ visual warning indication unit.
- The brightness of the sign remains constant over its entire operating range of 7 to 30 volts DC due to the unique "power boost" circuitry employed. This ensures that even with a system running on depleted batteries, all signs remain at full intensity.
- A range of standard text signs are available and customised text and languages are easily accommodated due to the unique method employed to apply the lettering.
- The split level design allows one message to be displayed in the top half of the sign and an additional message to be displayed in the bottom half of the sign allowing for two stage warnings for systems such as extinguishing protection systems.



Split level function



Model No. K27102

Panels

Product Code Description

K27102	Illuminated sign - "FIRE ALARM DO NOT ENTER"
K27101	Illuminated sign - "FIRE ALARM EVACUATE AREA"
K27202	Illuminated sign - "EXTINGUISHANT SYSTEM ACTIVATED"
X2710	Special Designation (specify text)
X2720	Special Designation (specify text)
X2730	Special Designation (specify text)


Colour

Red on black
Red on black
Black on yellow
Red on black
Black on yellow
Black on green

Specifications

Technical


Size	- 300mm (W) x 195mm (H) x 50m (D)
Construction	- 1.2mm fully welded sheet steel
Finish	- Epoxy powder coated
Colour - lid & box	- BS 00 A 05 grey - fine texture
Power Consumption	- 140 milliamps max at 24V DC
Operating temperature	- -5°C to +50°C
Operating humidity	- To 95% non-condensing

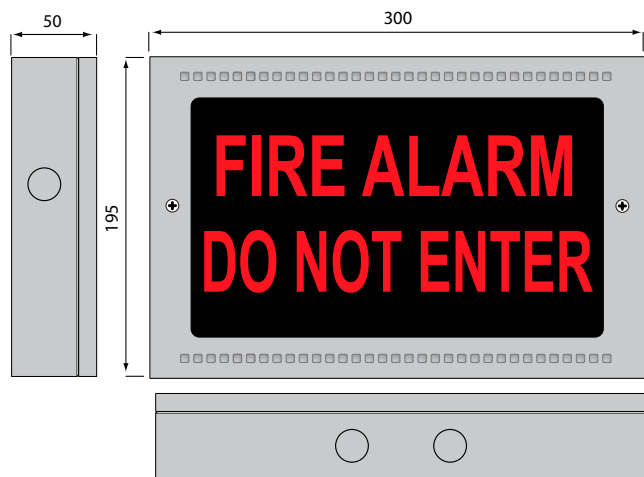

Model No. K27102



Model No. K27101

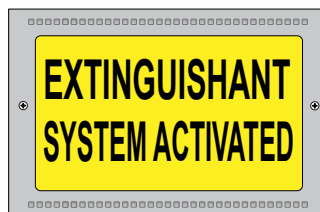

Model No. K27202



Special designations example

